


Thermal pads

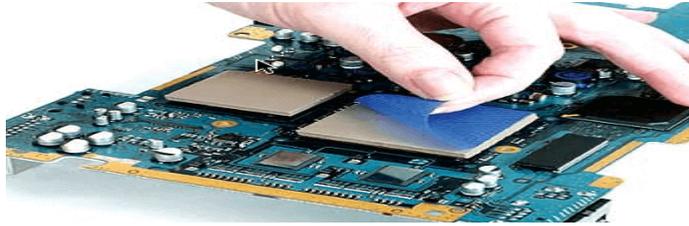

Thermal pads 1150

Thermal interface materials (TIMs) are designed to fill in air gaps and microscopic irregularities, resulting in dramatically lower thermal resistance and thus better cooling

Thermal interface material is used to fill the gaps between thermal transfer surfaces such as between microprocessors and heat sinks, in order to increase the efficiency of thermal transfer. There is usually air in these gaps, and air is a notoriously poor conductor. The interface material is easy to handle and is not messy. It is available in solid and liquid form and comes in various thicknesses.

Thermal conductivity

The thermal conductivity of the interface material determines its thermal performance to a large extent. The high thermal conductivity of this product guarantees sufficient heat transfer, resulting in a better cooling solution and the desired heat dissipation.

This film, with its excellent thermal and electrical properties, is especially suitable for high-power applications. The material performs so well that it can be used reliably in densely packed electronic applications.

Properties

- Good insulation properties
- Heat conducting
- Good compressibility
- Flexible
- Environmentally friendly

Applications

- RD-RAM memory chips
- Heat pipe thermal solutions
- automotive engines
- control units
- plasma supply panels

Benefits

- Temperatures up to 220 °C
- High shielding performance
- Water sealing up to 10 meters
- Pressure resistant
- Salt spray / chemical resistant
- Fluorosilicone rubber for fuel/oil resistance
- Supplied as sheets, strips or die-cuts
- Thicknesses of 0.5 to 5 mm (see table below)

Thermal pads

Part number	Color	Thermal resistance	Thermal impedance	Thermal conductivity	Breakdown voltage	Dielectric breakdown Ed; ac	Volume resistivity	Dielectric loss factor tan δ	Dielectric constant εr	Hardness	Young's modulus	Application temperature	Density	Available thickness
		K/W	°Cmm ² /W Kin ² /W	W/mK	KV	KV/mm	Ωm			Shore 00	N/cm ²	°C		mm
1150-125	Dark orange	0.8	322 0.5	1.5	6.0	12.0	6.1 x 10 ¹⁰	1.5 x 10 ⁻¹	4.3	10 - 25	24	-40 to +180	2.0	0.5, 1.0, 1.5, 2.0, 3.0, 4.0, 5.0
1150-128	Pink / dark orange	0.8	322 0.5	1.5	6.0	12.0	1.8 x 10 ¹²	1.0 x 10 ⁻³	2.3	10 - 25	67	-40 to +180	1.9	0.5, 2.5, 4.5
1150-200	Pink/yellow	1.2	480 0.75	1.0	8.0	16.0	1.0 x 10 ¹¹	1.5 x 10 ⁻³	3.9	10 - 20	22	-60 to +200	1.61	0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0
1150-225	Orange	0.6	240 0.37	2.0	6.0	12.0	2.2 x 10 ¹¹	1.0 x 10 ⁻³	3.6	30 - 45	58	-40 to +180	1.65	0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 4.0, 5.0
1150-228	Pink / orange	0.6	240 0.37	2.0	6.0	12.0	2.8 x 10 ¹¹	1.0 x 10 ⁻³	2.5	30 - 45	160	-40 to +180	1.95	0.5, 1.0
1150-235	Yellow	0.6	240 0.37	2.0	6.0	12.0	1.7 x 10 ¹¹	2.0 x 10 ⁻²	3.7	25 - 40	32	-40 to +200	1.65	0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 5.0
1150-238	Pink / yellow	0.6	240 0.37	2.0	6.0	12.0	4.7 x 10 ¹¹	1.0 x 10 ⁻³	1.9	25 - 40	122	-40 to +200	1.65	0.5, 1.0, 2.0, 3.0, 4.5
1150-300	Blue	0.41	164 0.25	3.0	7.0	14.0	1.0 x 10 ¹¹	5.0 x 10 ⁻³	3.3	60 - 75	24	-60 to +200	1.71	0.5, 0.8, 1.0, 1.5, 2.0, 3.0, 4.0, 5.0
1150-320	Yellow	0.5	147 0.23	2.5	5.0	10.0	6.8 x 10 ¹¹	2.9 x 10 ⁻²	3.4	25 - 38	32	-40 to +180	1.69	1.0, 1.5, 2.0, 3.0, 4.0, 4.5
1150-325	Mint	0.41	164 0.25	3.0	6.0	12.0	8.5 x 10 ¹⁰	1.5 x 10 ⁻²	3.8	35 - 50	64	-40 to +180	1.95	0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 4.0
1150-450	Brown	0.27	108 0.18	4.5	5.0	10.0	3.6 x 10 ¹²	3.0 x 10 ⁻³	2.5	65 - 75	95	-40 to +180	1.32	0.5, 1.0
1150-500	Brown	0.25	100 0.15	5.0	1.0	2.0	1.0 x 10 ¹¹	1.5 x 10 ⁻³	3.9	65 - 75	70	-60 to +200	1.33	0.5, 1.0, 1.5, 2.0
1150-525	Violet	0.22	89 0.14	5.5	1.25	2.5	1.6 x 10 ¹³	1.0 x 10 ⁻³	2.7	50 - 65	99	-40 to +180	1.18	0.5, 1.0, 1.5, 2.0, 2.5, 3.0
1150-550	Light grey	-	0.22	6.0	>8.0	15.5	0.62 x 10 ¹²	-	5.0	55-65	-	-58 to +200	-	0.5, 1.0, 1.5, 2.0, 2.5
1150-600	Grey	0.2	80 0.12	6.0	1.5	3.0	1.7 x 10 ¹⁰	2.0 x 10 ⁻³	2.5	60 - 75	77	-60 to +180	1.28	0.5, 1.0, 1.5
1150-U281 (silicon free)	Grey	< 0.6	240 0.37	2.0	7.0	14.0	5.3 x 10 ⁹	7.8 x 10 ⁻²	5.6	55 - 65	244	-40 to +130	1.5	0.5, 1.0, 2.0

These values are measured under laboratory conditions.
In other situations results may differ; please read our Guarantee.

Thermal pads

Series	Part number	Thickness (mm)	Width (mm)	Length (mm)
1150	Select an option:			
	125 :	Specify the thickness in mm. Thicknesses available from 0.5 to 5 mm. Other thickness on request.	Specify the width in mm	Specify the length in mm
	128 :			
	200 :			
	225 :			
	228 :			
	235 :			
	238 :			
	300 :			
	320 :			
	325 :			
	450 :			
	500 :			
	525 :			
	600 :			
	U281 :			

* Note: The red blocks are required