


BB02-1F :- 2.00mm (0.079") PIN HEADER, SINGLE ROW, U TYPE, THROUGH HOLE, 02 to 40 CONTACTS

SPECIFICATIONS



CURRENT RATING	2 AMP
VOLTAGE RATING	150V AC/DC
CONTACT RESISTANCE	20m OHMS MAX.
INSULATOR RESISTANCE	5000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	AC 500 V
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	BRASS
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0
	STANDARD : NYLON 6T
PLATING	GOLD, TIN, OR SELECTIVE OVER 30-50U" NICKEL
SOLDERABILITY:	IR REFLOW: 260°C FOR 10 SEC
	WAVE: 230°C FOR 5-10 SEC
	MANUAL SOLDER: 350°C FOR 3-5 SEC

NOTES:


1. BULK PACKAGE IN BAG.
2. MATING SOCKETS AVAILABLE, CHECK WEBSITE FOR DETAILS. 

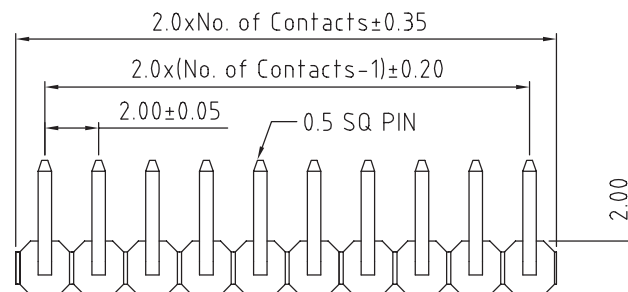


(EXAMPLE OF 10 CONTACTS PART)

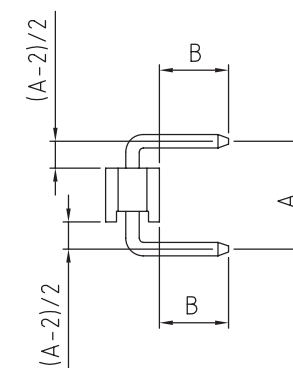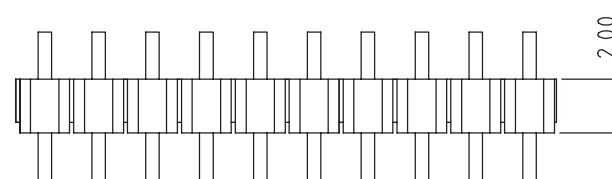

HOW TO ORDER

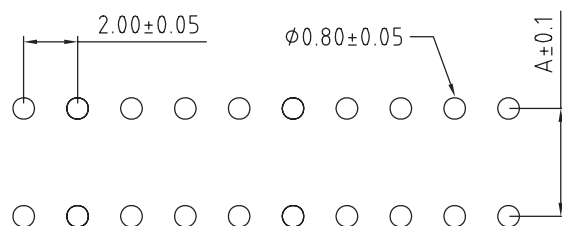

RECOMMENDED PCB HOLE LAYOUT

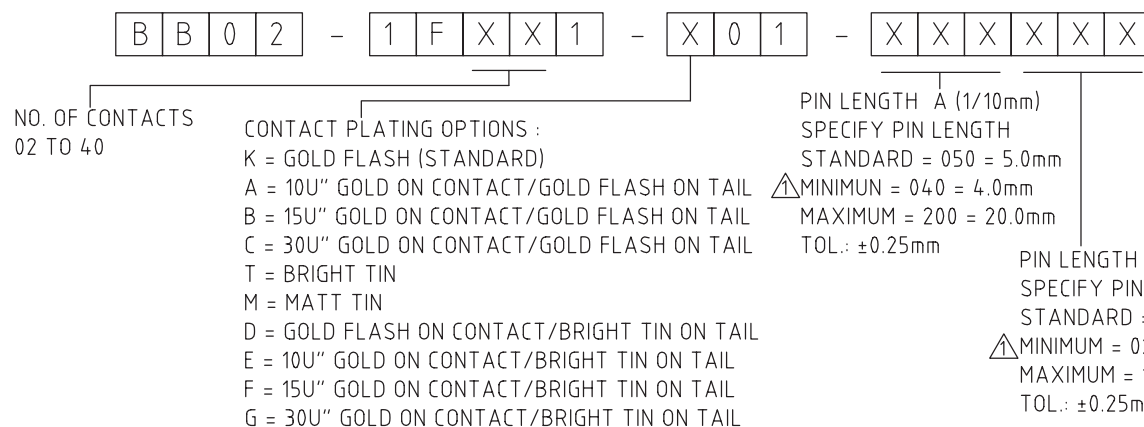[illegible]