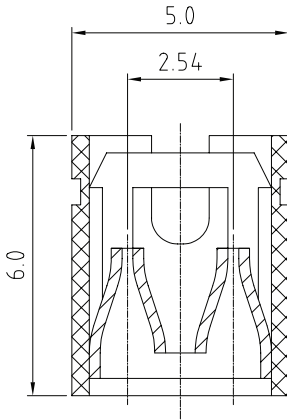



BB02-QF		CUSTOMER PRODUCT SPECIFICATION SHEET					RoHS Compliant			
BB02-QF : 2.54mm MINI JUMPER, OPEN TYPE, 2 CONTACTS										
<div><div>SPECIFICATIONS</div><div><div>CURRENT RATING</div><div>3 AMPS</div></div><div><div>VOLTAGE RATING</div><div>250V AC/DC</div></div><div><div>WITHSTANDING VOLTAGE</div><div>500V AC/MINUTE</div></div><div><div>INSULATOR RESISTANCE</div><div>1000 MEGOHMS MIN.</div></div><div><div>CONTACT RESISTANCE</div><div>20m OHMS MIN.</div></div><div><div>OPERATING TEMPERATURE</div><div>-40°C TO +105°C</div></div><div><div>CONTACT MATERIAL</div><div>BRASS</div></div><div><div>INSULATOR MATERIAL</div><div>POLYESTER UL 94V-0</div></div><div><div>STANDARD:</div><div>PBT</div></div><div><div>PLATING</div><div>GOLD FLASH OVER NICKEL</div></div></div> <div><div>MATES WITH: - 2.54MM PIN HEADERS</div></div> <div><div>NOTES:</div><div>1. PACKAGING: 2,000PCS PER BAG.</div></div>										
										
<div>HOW TO ORDER</div> <div><div>B</div><div>B</div><div>0</div><div>2</div><div>-</div><div>Q</div><div>F</div><div>0</div><div>2</div><div>2</div><div>-</div><div>K</div><div>0</div><div>1</div><div>-</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div></div>										

HOW TO ORDER

B

B

0

2

-

Q

F

0

2

2

-

K

0

1

-

0

0

0

0

0

0