

BB02-QG

CUSTOMER PRODUCT SPECIFICATION SHEET

RoHS
Compliant

BB02-QG : 2.54mm MINI JUMPER, CLOSED TYPE, 2 CONTACTS


SPECIFICATIONS

CURRENT RATING	3 AMPS
VOLTAGE RATING	250V AC/DC
WITHSTANDING VOLTAGE	500V AC/MINUTE
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
CONTACT RESISTANCE	20m OHMS MIN.
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	BRASS
INSULATOR MATERIAL	POLYESTER UL 94V-0
	STANDARD: PBT
PLATING	GOLD FLASH OVER NICKEL

MATES WITH: - 2.54MM PIN HEADERS

NOTES:

1. PACKAGING: 2,000PCS PER BAG.

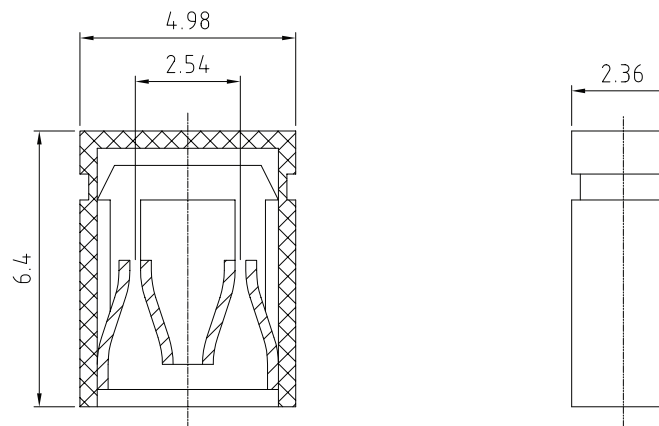

HOW TO ORDER

B B 0 2 - Q G 0 2 2 - K 0 1 - 0 0 0 0 0 0

REV DATE & DRN
10 22/07/08 - NYW RELEASE


Scale: 8=1

Drawn: NYW

App'd: XXXX

Date: 22 JUL '08

THIRD ANGLE



Title JUMPER

Revision: 1.0

Unstated Tolerances:
X ± 0.3
XX ± 0.2Material
SEE NOTE

NOT TO SCALE

Unit: mm

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE
COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: BB02-QG

BB02-QG

Drawing Number:

Sheet 1 of 1

Drawing © E and O E