

SPECIFICATIONS :

CURRENT RATING: 1.0AMP Δ

INSULATOR RESISTANCE: 1000 MEGOHMS MIN. Δ

DIELECTRIC WITHSTANDING: AC 300 V Δ

CONTACT RESISTANCE: 20m OHMS MAX. Δ

OPERATING TEMPERATURE: -40°C TO +105°C

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATOR MATERIAL: THERMOPLASTIC, UL 94V-0

STANDARD: LCP + 30%GF

PLATING: GOLD OR TIN OVER 30-50U" NICKEL

SOLDERABILITY IR REFLOW: 280°C FOR 10 SEC

MANNUAL SOLDER: 380°C FOR 3-5 SEC



MATES WITH: - BB02-YJ BB02-YM

BB02-YK BB02-YN

BB02-YL

NOTES:

1. RECOMMENDED MATING PIN LENGTH = 1.5MM.

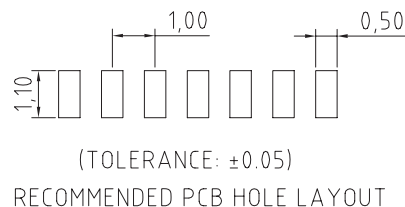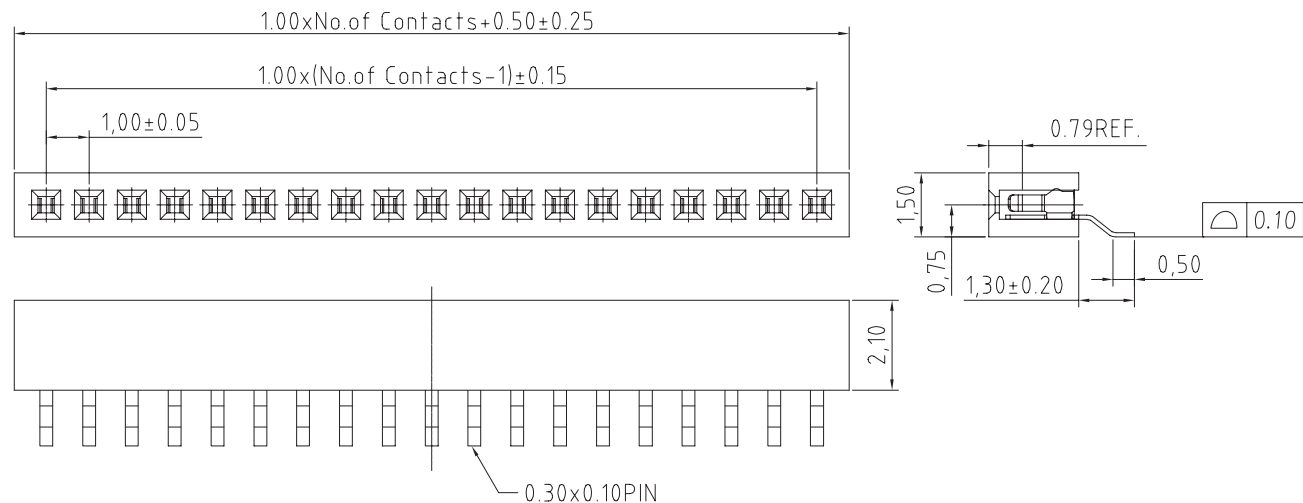

HOW TO ORDER

B	B	0	2	-	W	F	X	X	2	-	X	0	X	-	0	0	0	0	0	0
NO. OF CONTACTS 02 to 35 Δ								CONTACT PLATING OPTIONS K = GOLD FLASH (STANDARD) A = 10U" GOLD ON CONTACT/GOLD FLASH ON TAIL B = 15U" GOLD ON CONTACT/GOLD FLASH ON TAIL T = BRIGHT TIN M = MATT TIN				PACKAGING OPTIONS 3 - TUBE 4 - TUBE & FILM 6 - TAPE & REEL 7 - TAPE & REEL & FILM								