

## TG-APC93 / PC93

### Non-silicone Thermal Pad

REACH Compliant

RoHS Compliant

UL Compliant

#### Features

- Non siloxane and oil-bleed
- Ultra soft and great elongation
- Electrical insulation
- Very low thermal impedance


#### Application:

Applications that require no silicone


Electronic components - 5G, Aerospace, AI, AIoT, AR/VR/MR/XR, Automotive, Consumer Devices, Datacom, Electric Vehicle, Electronic Products, Energy Storage, Industrial, Lighting Equipment, Medical, Military, Netcom, Panel, Power Electronics, Robot, Servers, Smart Home, Telecom, etc.

#### Properties



Thermal Conductivity: 2.1 W/m·K



Hardness: 55 (Shore OO)



#### Contact Pressure, Thermal Impedance, and Deflection

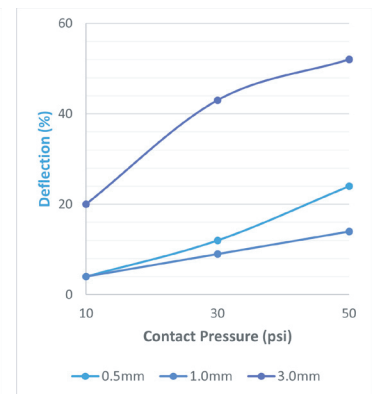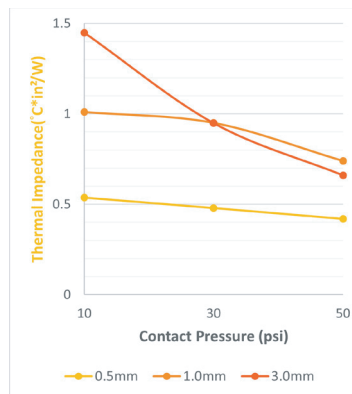

Properties	Unit	TG-APC93 / PC93	Tolerance	Test Method
Thermal Conductivity	W/m·K	2.1	± 10%	ASTM D5470 Modified
Thickness	mm	0.5~5.0	-	ASTM D374
	inch	0.0197~0.1969	-	ASTM D374
Color	-	Gray	-	Colorimeter CIE 1976
Flame Rating	-	V-0	-	UL 94
Dielectric Breakdown Voltage	KV/mm	≥10.2	-	ASTM D149
Weight Loss	%	<1	-	ASTM E595 Modified
Density	g/cm³	2.1	± 0.2	ASTM D792
Operating Temperature	°C	-30~+125	-	-
Volume Resistivity	Ohm-m	>10 <sup>10</sup>	-	ASTM D257
Elongation	%	350	-	ASTM D412
Tensile Strength	kgf/cm²	1	-	ASTM D412
Standard Format	-	Sheet	-	-
Hardness	Shore OO	55	± 10	ASTM D2240

For thicknesses less than 1.0mm, hardness will be adjusted to 50-75 Shore OO to facilitate effective removal of liner during production  
 Different tolerances according to the selected thickness  
 Die-cut for different shapes