

WB06-AA





CUSTOMER PRODUCT SPECIFICATION SHEET

WB06-AA :-0.8mm WTB WAFER, STRAIGHT, SMT TYPE, SINGLE ROW - 02 to 22 CONTACTS



SPECIFICATIONS

CURRENT RATING	0.5A AC/DC (FOR AWG#32) 0.2A AC/DC (FOR AWG#36)
VOLTAGE RATING	30V AC/DC
INSULATOR RESISTANCE	100 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	200V AC/MINUTE
OPERATING TEMPERATURE	-25°C TO +85°C
CONTACT RESISTANCE	20m OHMS MAX.
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0
FINISH	STANDARD: NYLON 6T (COLOR: BEIGE) MATTE TIN PLATED OVER NICKEL
MATES WITH:-	WB06-AC

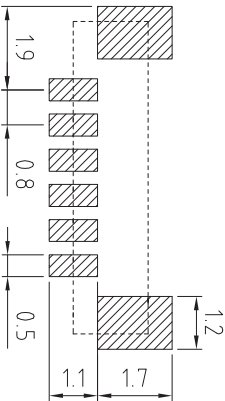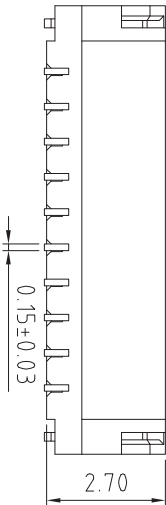

(Tolerance: ±0.05)  
RECOMMENDED PC BOARD LAYOUT

HOW TO ORDER

WB06 - AAAXX1 - M08 - N

NO. OF CONTACTS:  
02 TO 22  
PACKAGING TYPE:  
8 = TAPE & REEL + CAP

REV. DATE & DRN 10 21/02/13 - NYW RELEASE	Scale: 8:1	THIRD ANGLE	Unstated Tolerances: X ±0.20 XX ±0.15	Material SEE NOTE	Type: WB06-AA
Drawn: NYW	App'd: XXXX	Date: 21 FEB. '13	Title: WAFER	Revision: 10	Unit: mm
THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT					Drawing Number: WB06-AA Sheet 1 of 1
www.infratron.de					E and O E