

SPECIFICATIONS


CURRENT RATING	1 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	300 V AC/DC
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	PHOSPHOR BRONZE
INSULATOR MATERIAL	POLYESTER, UL 94V-0
	STANDARD: NYLON 6T
PLATING	GOLD, TIN, OR SELECTIVE OVER 30~50U" NICKEL
SOLDERABILITY	IR REFLOW: 260°C FOR 10 SEC
	WAVE: 230°C FOR 5-10 SEC
	MANNUAL SOLDER: 350°C FOR 3-5 SEC

NOTES:

1. RECOMMANDED MATING PIN LENGTH: 3.0MM

MATES WITH :-

BB02-BC	BB02-BS
BB02-BD	BB02-BY
BB02-BE	BB02-BZ
BB02-BK	BB02-NE
BB02-BP	

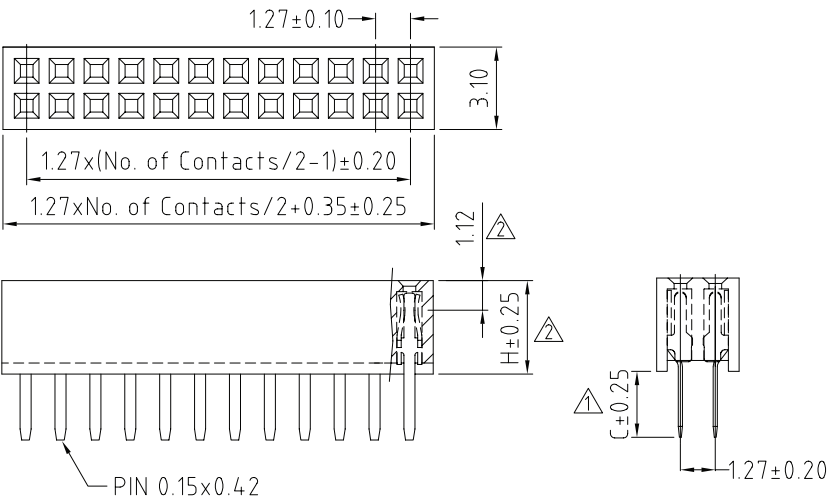

HOW TO ORDER




NO. OF CONTACTS
06 TO 98
00 = 100

CONTACT PLATING OPTIONS
K = GOLD FLASH (STANDARD)
A = 10U" GOLD ON CONTACT/GOLD FLASH ON TAIL
B = 15U" GOLD ON CONTACT/GOLD FLASH ON TAIL
C = 30U" GOLD ON CONTACT/GOLD FLASH ON TAIL
T = BRIGHT TIN
M = MATT TIN
D = GOLD FLASH ON CONTACT/BRIGHT TIN ON TAIL

INSULATOR HEIGHT 'H'
A = 3.4MM (C=2.17)
B = 4.4MM (C=2.3)

PACKAGING OPTIONS
3 = TUBE
8 = T & R + CAP
STANDARD = 3



RECOMMENDED PC BOARD HOLE LAYOUT