

SPECIFICATIONS

CURRENT RATING	1 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	AC 300 V
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	BRASS
INSULATOR MATERIAL	POLYESTER UL 94V-0
	STANDARD NYLON 6T
PLATING	GOLD, TIN OR SELECTIVE OVER 30~50U" NICKEL
SOLDERABILITY	IR REFLOW: 260°C FOR 10 SEC
	WAVE: 230°C FOR 5-10 SEC
	MANNUAL SOLDER: 350°C FOR 3-5 SEC


PACKED IN TRAY.

MATES WITH :-

BB02-EA

BB02-EB

BB02-EC

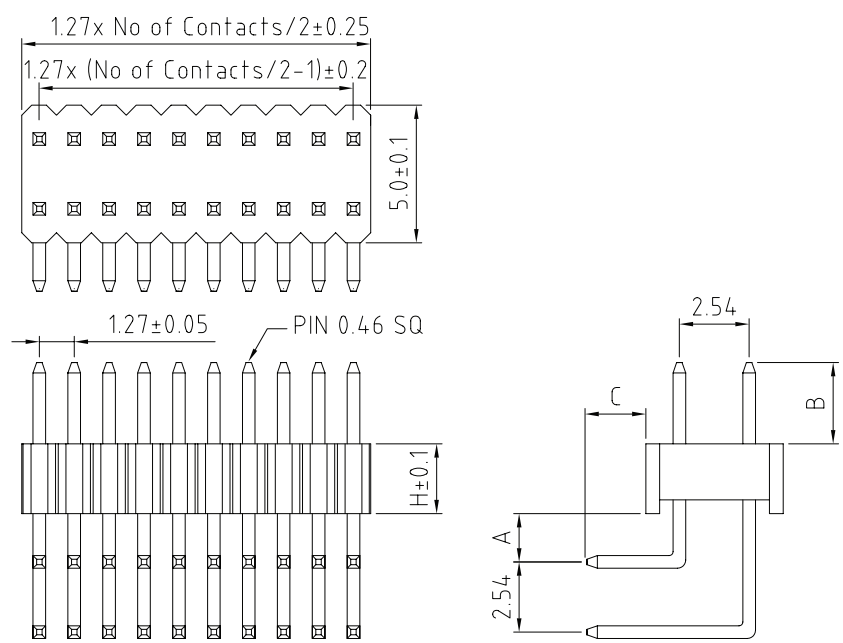

HOW TO ORDER

BB02

-

DEXX1

-

XX2

-

XXXXXX

NO. OF CONTACTS

06 TO 80

CONTACT PLATING OPTIONS

K = GOLD FLASH (STANDARD)

A = 10U" GOLD ON CONTACT/GOLD FLASH ON TAIL

B = 15U" GOLD ON CONTACT/GOLD FLASH ON TAIL

C = 30U" GOLD ON CONTACT/GOLD FLASH ON TAIL

T = BRIGHT TIN

M = MATT TIN

D = GOLD FLASH ON CONTACT/BRIGHT TIN ON TAIL

E = 10U" GOLD ON CONTACT/BRIGHT TIN ON TAIL

F = 15U" GOLD ON CONTACT/BRIGHT TIN ON TAIL

G = 30U" GOLD ON CONTACT/BRIGHT TIN ON TAIL

HEIGHT 'H'

A = 1.70MM

B = 2.54MM (STANDARD)

C = 3.00MM

PIN LENGTH C (1/10mm)

PLEASE SPECIFY PIN LENGTH REQUIRED

I.E. 2.5mm = 25

TOL. ± 0.25 mm

PIN LENGTH A (1/10mm)

PLEASE SPECIFY PIN LENGTH REQUIRED

I.E. 2.5mm = 25

TOL. ± 0.25 mm

PIN LENGTH B (1/10mm)

PLEASE SPECIFY PIN LENGTH REQUIRED

I.E. 2.5mm = 25

TOL. ± 0.25 mm

