




BB02-HH :- 2.54mm (0.1") PIN HEADER SMD TYPE ,SINGLE ROW, RIGHT ANGLE - 02 to 40 CONTACTS

SPECIFICATIONS



CURRENT RATING	3 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	AC 600 V
CONTACT RESISTANCE	20 m OHMS MAX.
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	BRASS
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0
	STANDARD NYLON 6T
PLATING	GOLD, TIN OR SELECTIVE OVER 30-50U" NICKEL
SOLDERABILITY	IR REFLOW: 260°C FOR 10 SEC
	MANUAL SOLDER: 350°C FOR 3-5 SEC

MATES WITH :-

BB02-JB	BB02-JJ
BB02-JC	BB02-JL
BB02-JE	BB02-JS
BB02-JF	BB02-JT
BB02-JG	BB02-KR

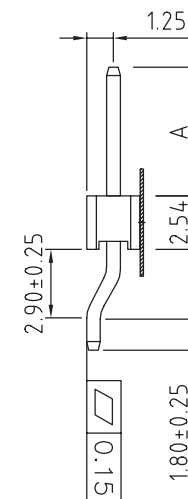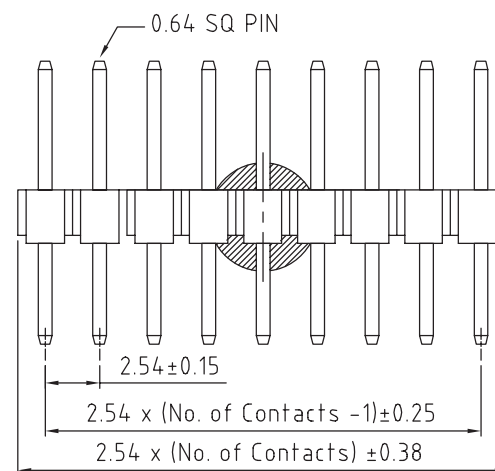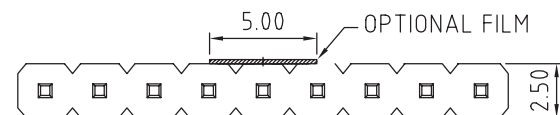

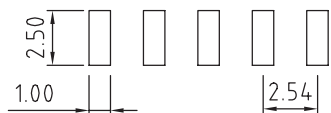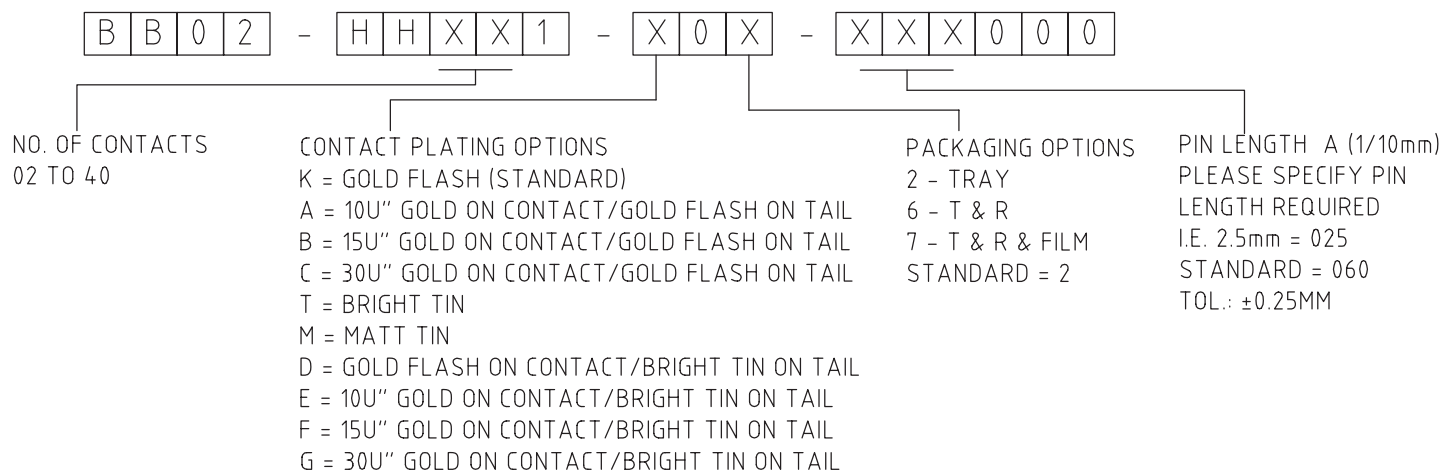

HOW TO ORDER



RECOMMENDED PCB LAYOUT
(TOLERANCE: ± 0.05)

REV.	DATE & DRN	10	06/07/05 - NYW RELEASE
11	05/08/06 - NYW	11	DRAWING MODIFICATION
12	05/06/08 - CHC	12	PLATING MODIFICATION
13	17/07/09 - NYW	13	ADD FILM DRAWING
			REMOVE PLY OPTION 8 AND
			DRAWING MODIFICATION

Scale:	4:1	THIRD ANGLE		Unstated Tolerances: X: ± 0.30 X: ± 0.25 .XX ± 0.15 .XXX ± 0.10	Material		Type: BB02-HH
Drawn:	CHC			SEE NOTE			BB02-HH
App'd:	XXXX	Title	PIN HEADER	NOT TO SCALE			Drawing Number:
Date:	17 JAN '09	Revision:	1.3		Unit: mm		Sheet 1 of 1
						© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	Drawing © E and O E